

## TO-220 Plastic-Encapsulate Voltage Regulators

**L7812CV** Three-terminal positive voltage regulator


### FEATURES

**Maximum Output current  $I_{OM}$ : 1.5 A**

**Output voltage  $V_o$ : 12 V**

**Continuous total dissipation**

$P_D$ : 1.5 W ( $T_a = 25^\circ C$ )  
15 W ( $T_c = 25^\circ C$ )

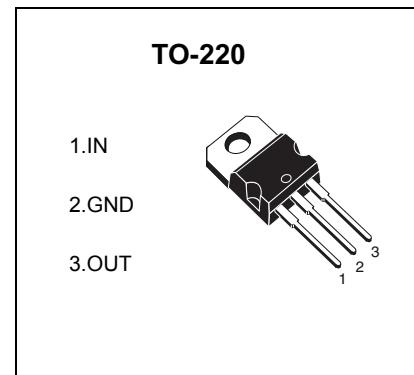

### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	35	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	83.3	°C/W
Thermal Resistance from Junction to Case	$R_{\theta JC}$	8.3	°C/W
Operating Junction Temperature Range	$T_{OPR}$	0~+150	°C
Storage Temperature Range	$T_{STG}$	-55~+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_i=19V$ ,  $I_o=500mA$ ,  $C_i=0.33\mu F$ ,  $C_o=0.1\mu F$ , unless otherwise specified )

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit	
Output voltage	$V_o$	25°C	11.5	12.0	12.5	V	
		$I_o = 5.0mA - 1.0A$ , $P \leq 15W$ $14.5V \leq V_i \leq 27V$	0-125°C	11.4	12	12.6	V
Load Regulation	$\Delta V_o$	$14.5V \leq V_i \leq 30V$	25°C		10	240	mV
		$16V \leq V_i \leq 22V$	25°C		3	120	mV
Line regulation	$\Delta V_o$	$I_o = 5mA - 1.5A$	25°C		12	240	mV
		$I_o = 250mA - 750mA$	25°C		4	120	mV
Quiescent Current	$I_q$		25°C		4.3	8	mA
Quiescent Current Change	$\Delta I_q$	$5.0mA \leq I_o \leq 1.0A$	0-125°C			0.5	mA
		$14.5V \leq V_i \leq 30V$	0-125°C			1.0	mA
Output voltage drift	$\Delta V_o / \Delta T$	$I_o = 5mA$	0-125°C		-1		mV/°C
Output Noise Voltage	$V_N$	$f = 10Hz$ to $100KHz$	25°C		75		μV
Ripple Rejection	$RR$	$f = 120Hz$ , $15V \leq V_i \leq 25V$	0-125°C	55	71		dB
Dropout Voltage	$V_d$	$I_o = 1.0A$	25°C		2		V
Output resistance	$R_o$	$f = 1KHz$	25°C		18		mΩ
Short Circuit Current	$I_{SC}$		25°C		350		mA
Peak Current	$I_{pk}$		25°C		2.2		A

