

TO-220 Plastic-Encapsulate Voltage Regulators

L7810 CV Three-terminal positive voltage regulator

FEATURES


Maximum output current I_{OM} : 1.5 A

Output voltage V_o : 9 V

Continuous total dissipation

P_D : 1.5 W ($T_a = 25^\circ C$)

15 W ($T_c = 25^\circ C$)

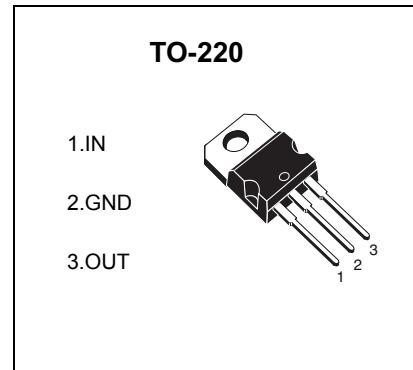

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	83.3	°C/W
Thermal Resistance from Junction to Case	$R_{\theta JC}$	8.3	°C/W
Operating Junction Temperature Range	T_{OPR}	0~+150	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE (Vi=16V, Io=500mA,Ci=0.33μF,Co=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT	
Output voltage	V_o	25°C	9.50	10	10.5	V	
		12.5V≤ V_i ≤24V, Io = 5mA-1A, P ≤15W	0-125°C	9.60	10	10.6	V
Load Regulation	ΔV_o	Io =5mA-1.5A	25°C		12	180	mV
		Io =250mA-750mA	25°C		4	90	mV
Line regulation	ΔV_o	12.5V≤ V_i ≤28V	25°C		7	180	mV
		13V≤ V_i ≤19V	25°C		2	90	mV
Quiescent Current	I_q		25°C		4.3	8	mA
Quiescent Current Change	ΔI_q	12.5V≤ V_i ≤28V	0-125°C			1	mA
		5mA≤ I_o ≤1A	0-125°C			0.5	mA
Output voltage drift	$\Delta V_o/\Delta T$	I_o =5mA	0-125°C		-1		mV/°C
Output Noise Voltage	V_N	10Hz≤f≤100KHz	25°C		60		uV
Ripple Rejection	RR	13V≤ V_i ≤25V,f=120Hz	0-125°C	55	70		dB
Dropout Voltage	V_d	I_o =1A	25°C		2		V
Output resistance	R_o	f=1KHz	25°C		18		mΩ
Short Circuit Current	I_{sc}		25°C		400		mA
Peak Current	I_{pk}		25°C		2.2		A

TYPICAL APPLICATION

