

TO-220 Plastic-Encapsulate Voltage Regulators

L7908 CV Three-terminal negative voltage regulator

FEATURES


Maximum output current I_{OM} : 1.5 A

Output voltage V_o : -8 V

Continuous total dissipation

P_D : 1.5 W ($T_a = 25^\circ C$)

15 W ($T_c = 25^\circ C$)

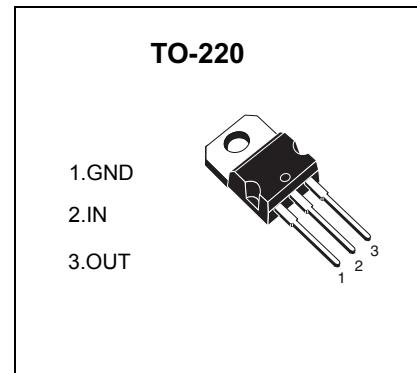

ABSOLUTE MAXIMUM RATINGS(Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	-35	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	83.3	°C/W
Thermal Resistance from Junction to Case	$R_{\theta JC}$	8.33	°C/W
Operating Junction Temperature Range	T_{OPR}	0~+150	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE($V_i=-14V, I_o=500mA, C_i=2.2\mu F, C_o=1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit	
Output Voltage	V_o	25°C	-7.7	-8	-8.3	V	
		-10.5V≤ V_i ≤-23V, $I_o=5mA$ -1A, $P \leq 15W$	0-125°C	-7.6	-8	-8.4	V
Load Regulation	ΔV_o	$I_o=5mA$ -1.5A	25°C		15	160	mV
		$I_o=250mA$ -750mA	25°C		5	80	mV
Line Regulation	ΔV_o	-10.5V≤ V_i ≤-25V	25°C		12.5	160	mV
		-11V≤ V_i ≤-17V	25°C		4	80	mV
Quiescent Current	I_q		25°C		1.5	2	mA
Quiescent Current Change	ΔI_q	-10.5V≤ V_i ≤-25V	0-125°C		1	mA	
	ΔI_q	5mA≤ I_o ≤1A	0-125°C		0.5	mA	
Output Noise Voltage	V_N	10Hz≤f≤100KHz	25°C		200	μV	
Output Voltage drift	$\Delta V_o/\Delta T$	$I_o=5mA$	0-125°C		-0.6	mV/°C	
Ripple Rejection	RR	-11.5V≤ V_i ≤-21.5V, f=120Hz	0-125°C	54	60	dB	
Dropout Voltage	V_d	$I_o=1A$	25°C		1.1	V	
Peak Current	I_{pk}		25°C		2.1	A	

TYPICAL APPLICATION

