


## TO-220 Plastic-Encapsulate Voltage Regulators

L7805CV Three-terminal positive voltage regulator

### FEATURES

- Maximum output current  $I_{OM}$ : 1.5 A
- Output voltage  $V_O$ : 5V
- Continuous total dissipation  $P_D$ : 1.5 W ( $T_a = 25^\circ C$ )

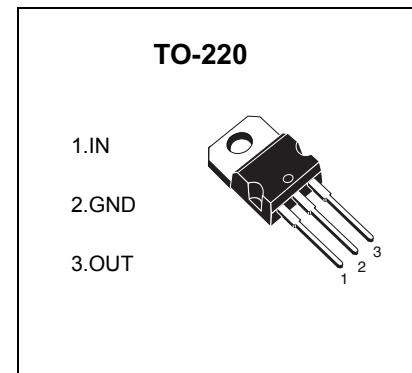

### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

| Parameter                               | Symbol          | Value    | Unit |
|---|-----------------|----------|------|
| Input Voltage                           | $V_i$           | 35       | V    |
| Thermal Resistance from Junction to Air | $R_{\theta JA}$ | 66.7     | °C/W |
| Operating Junction Temperature Range    | $T_{OPR}$       | -25~+125 | °C   |
| Storage Temperature Range               | $T_{STG}$       | -65~+150 | °C   |

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_i=10V, I_o=500mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )

| Parameter                | Symbol                | Test conditions              | Min       | Typ  | Max  | Unit      |
|--------------------------|-----------------------|------------------------------|-----------|------|------|-----------|
| Output voltage           | $V_o$                 | 25°C                         | 4.8       | 5.0  | 5.2  | V         |
|                          |                       | 7V≤ $V_i$ ≤20V, $I_o=5mA-1A$ | -25-125°C | 4.75 | 5.00 | 5.25      |
| Load Regulation          | $\Delta V_o$          | $I_o=5mA-1.5A$               | 25°C      | 9    | 100  | mV        |
|                          |                       | $I_o=250mA-750mA$            | 25°C      | 4    | 50   | mV        |
| Line regulation          | $\Delta V_o$          | 7V≤ $V_i$ ≤25V               | 25°C      | 4    | 100  | mV        |
|                          |                       | 8V≤ $V_i$ ≤12V               | 25°C      | 1.6  | 50   | mV        |
| Quiescent Current        | $I_q$                 |                              | 25°C      | 5    | 8    | mA        |
| Quiescent Current Change | $\Delta I_q$          | 7V≤ $V_i$ ≤25V               | -25-125°C | 0.3  | 1.3  | mA        |
|                          |                       | 5mA≤ $I_o$ ≤1A               | -25-125°C | 0.03 | 0.5  | mA        |
| Output Noise Voltage     | $V_N$                 | 10Hz≤f≤100KHz                | 25°C      | 42   |      | uV        |
| Output voltage drift     | $\Delta V_o/\Delta T$ | $I_o=5mA$                    | -25-125°C | -1.1 |      | mV/°C     |
| Ripple Rejection         | $RR$                  | 8V≤ $V_i$ ≤18V, f=120Hz      | -25-125°C | 62   | 73   | dB        |
| Dropout Voltage          | $V_d$                 | $I_o=1A$                     | 25°C      | 2    |      | μV/ $V_o$ |
| Output resistance        | $R_o$                 | f=1KHz                       | 25°C      | 10   |      | mΩ        |
| Short Circuit Current    | $I_{sc}$              |                              | 25°C      | 230  |      | mA        |
| Peak Current             | $I_{pk}$              |                              | 25°C      | 2.2  |      | A         |

\* Pulse test.

### TYPICAL APPLICATION

